




## ZAWÓR KULOWY MIĘDZYKOŁNIERZOWY PN16/40

**Produkowane zgodnie  
z Dyrektywą 2014/68/UE PED.**

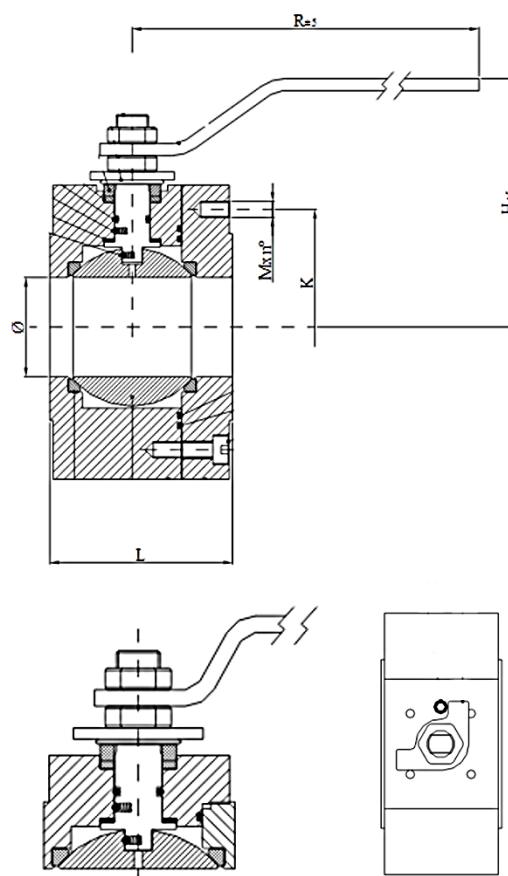

| DN  | Ø d | L   | K   | Mxn° | H   | R   | ISO 5211 | Kg  |
|-----|-----|-----|-----|------|-----|-----|----------|-----|
| 15  | 14  | 36  | 65  | 12x4 | 175 | 160 | F03      | 1.8 |
| 20  | 20  | 38  | 75  | 12x4 | 75  | 160 | F03      | 2   |
| 25  | 25  | 45  | 85  | 12x4 | 95  | 185 | F03      | 3   |
| 32  | 32  | 54  | 100 | 16x4 | 110 | 275 | F04      | 5   |
| 40  | 38  | 60  | 110 | 16x4 | 115 | 275 | F04      | 6.5 |
| 50  | 49  | 85  | 125 | 16x4 | 125 | 275 | F05      | 12  |
| 65  | 62  | 103 | 145 | 16x4 | 150 | 360 | F07      | 16  |
| 80  | 75  | 120 | 160 | 16x8 | 155 | 360 | F07      | 22  |
| 100 | 97  | 150 | 180 | 16x8 | 180 | 495 | F10      | 35  |