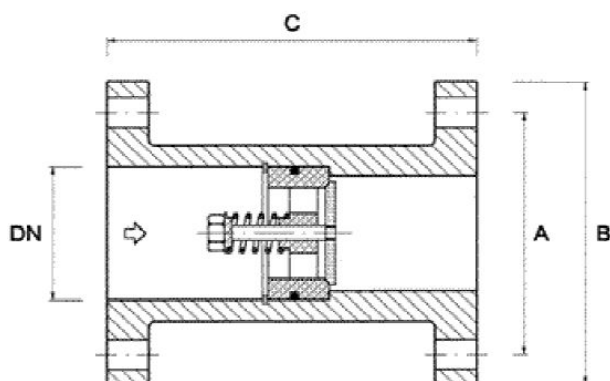



COPRIM

CERTIFICATO
**ZAWÓR
ZWROTNY**
CE 1115
**NON RETURN
VALVE**
CHARAKTERYSTYKA:

Korpus stalowy

Przyłącze kołnierzowe DN 40

Ciśnienie próbne 40 bar

Temperatura pracy – 30 + 50 ° C

DN	A	B	C
15	65	95	87
20	75	105	110
25	85	115	108
32	100	140	110
40	110	150	110
50	125	165	120
65	145	185	140
80	160	200	150
100	190	235	210
150	220	300	230